


SPX424 Main Features

GEOMETRICAL STABILITY CONTROL

- ✓ Outriggers multi-position and angle
- ✓ Automatic load of working area
- ✓ Different working area:
 - Red - 0%
 - Grey - pick&carry
 - Yellow - 50%
 - Green - 100%

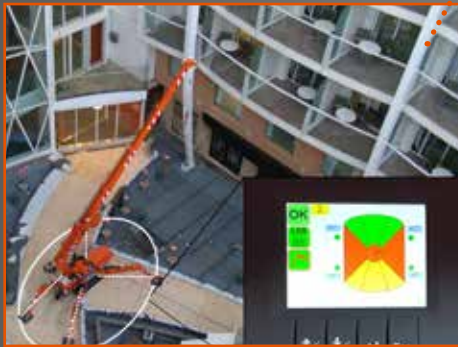

PLUG&PLAY SYSTEM CONTROL

- All accessories and tools:
- ✓ Integrated with the crane
 - ✓ Immediately recognized by the software
 - ✓ With a single radio remote control (same of the crane)



DIFFERENT ATTACHMENTS

- ✓ Three different JIBS
- ✓ Different tools completely integrated and radio remote controlled: glass manipulator, pipe manipulator, hydraulic fork...

SEARCHER HOOK



GLASS MANIPULATOR



MANUAL JIB



HYDRAULIC JIB




SPX424



Jekko srl
Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com

Product Catalog

SPX424

 2400 kg

 3150 x 775 x 1950 mm

 15.2 m

 11.8 m

The top of the range mini crane.
Technology, innovation and reliability enclosed in the best-seller mini crane ever.



Technical Information

Dimension	 L x W x H	3150 x 775 x 1950 mm
Stab Area		3710 x 3710 mm

Crane & Options Weights		Kg
	 SPX424CDH	2080
	 SPX424C+	2080
	 /	200
	 2.5T-D7	20
	 PP400-4DX	45
	 JIB800GX	25
	 JIB800.2H1MX	170
	 MR800.4-6+4P	300

SPX424CDH	Petrol Engine	KUBOTA D722-E3B	14.9 kW 20 Hp
SPX424C+	Standard or Lithium Battery	N.4 BATTERIES 6V, 420Ah	4.0 kW 5.5 Hp

Speed		CDH 1.8 km/h C+ 0.72 km/h
Extensibility		20°
Ext. Tracks		770-1100 mm

Boom Length
2.6 - 8.5 m 26 sec.

Electric Power Pack

	4 kW - 3F 400 VAC 50 Hz
	EU: 2 kW - 1F 220 VAC 50 Hz USA/CANADA: 4 kW - 1F 110 VAC 60 Hz

Max. Track Load

	0.55 kg/cm ²
---	-------------------------

Working Angle

0° / 75° 14 sec.

Rotation

360° / 1.5 rpm


Max. Outrigger Load

	2200 kg
---	---------



Winch & Fall Stages

	Main Winch	800 kg (Single line) 70 m - Ø 7 mm 26-31,8 m/min.
---	------------	---

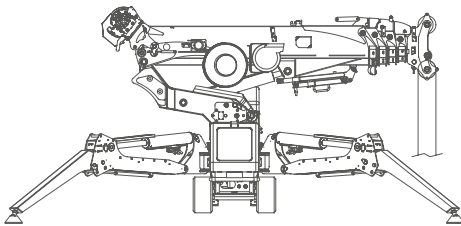


Max. Capacity	Line	Metres
 2400 kg	3	-20 m
 1600 kg	2	-32 m
 800 kg	1	-65 m




Load Chart

000 Capacity with jib

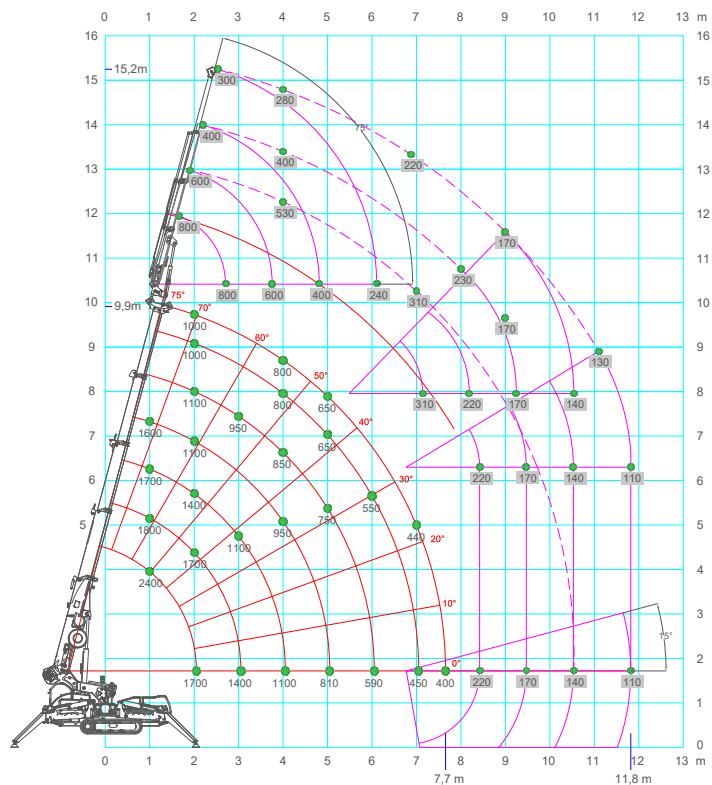

Dimensions

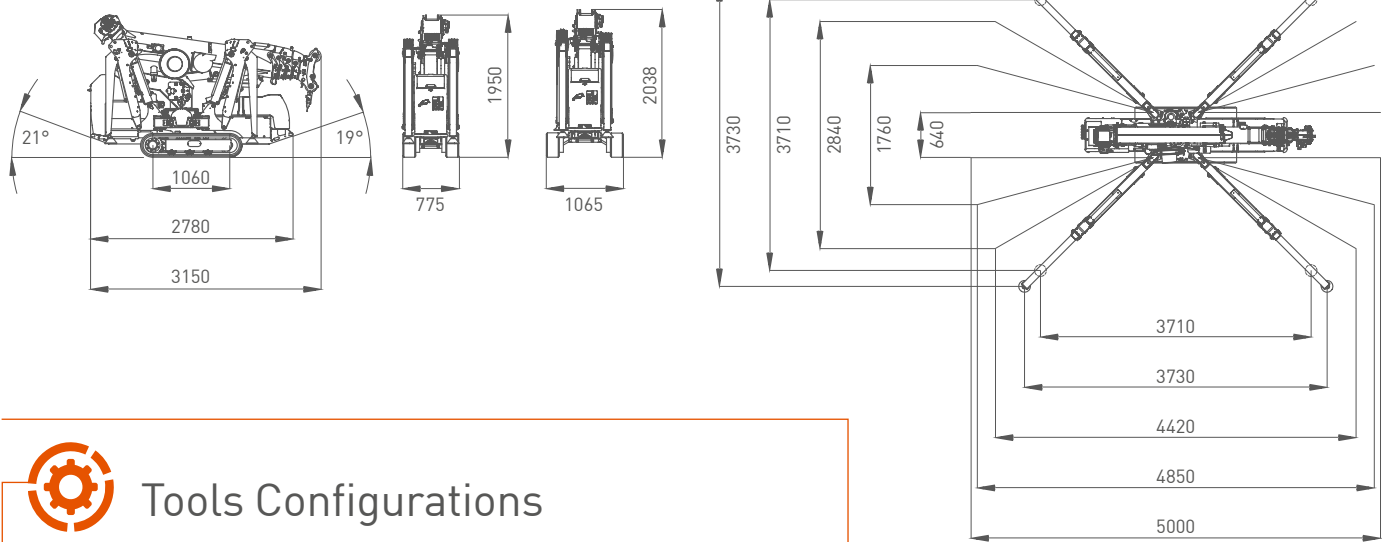

Tools Configurations

JIB800GX	JIB800.2H1MX	MV600.3E+	MR800.4-6+4P	JIB301/2GR
 800 kg	 800 kg	 600 kg	 800 kg	 300 kg
 800 kg @ 10.3 m	 300 kg @ 15.2 m	 600 kg @ 10.7 m	 650 kg @ 10.7 m	 300 kg @ 10.7 m
 300 kg @ 8.5 m	 110 kg @ 12 m	 160 kg @ 8.5 m	 200 kg @ 7 m	 300 kg @ 7 m

Crane Options

